

METALLIC CEILING SPEAKER



(EN54-24)

EN54-24 CERTIFICATED

CSE-6206EN



ONE SECOND INSTALLATION

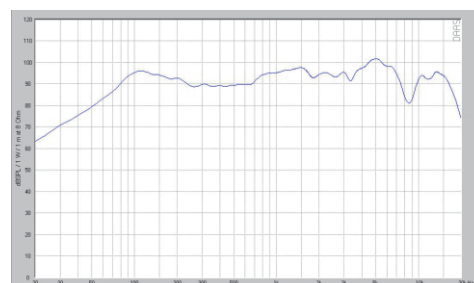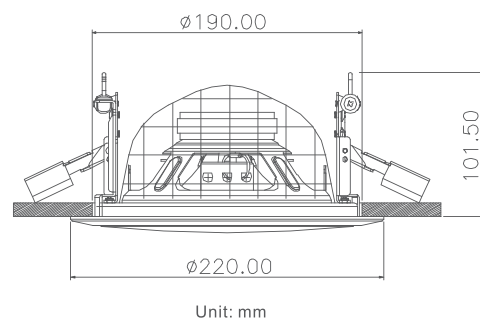

SPECIFICATIONS

Model No.	CSE-6206EN
Rated Power (rms)	6W
Speaker	6-1/2" Full Range, With Dual Cone
Power Rating(100V)	6W - 3W - 1.5W
Impedance	1667Ω - 3333Ω - 6667Ω
S.P.L.(at 1W/1M)	93dB
Maximum Acoustic Pressure	100dB
Frequency Response(-10dB)	90 Hz ~ 20K Hz
Dispersion 1KHz / 4KHz	120° / 60°
Ambient Temperature	-10°C ~ +55°C
Compliant Standard	EN54-24
Dimension	220mm(Dia.)x101.5mm(H)
Cut-Out Diameter	190(Dia.)mm
Material	Steel
Colour	White
Weight	1.13Kg
Power Selection Method	Plug ,Ceramic Terminal Block
Patent No.	Nr. 20 2011 005 495.0 , M 408895