


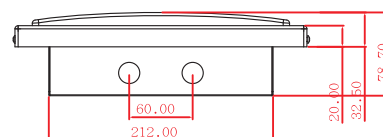



METALLIC IN-WALL LOUDSPEAKER



WSI-501BS



WSI-501BS-C

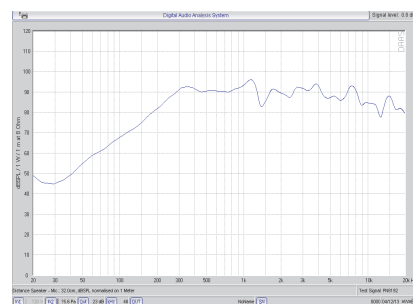

SPECIFICATIONS

Model No.	WSI-501BS	WSI-501BS-C
Rated Power (rms)	6W	6W
Speaker	5" Full Range	5" Full Range
Power Rating(100V)	6W-3W-1.5W	6W-3W-1.5W
Impedance	1667Ω 3333Ω 6667Ω	1667Ω 3333Ω 6667Ω
S.P.L. / Max Pressure (at 1W/1M)	92dB / 99dB	92dB / 99dB
S.P.L. / Max Pressure (at 1W/4M)	79dB / 87dB	80dB / 87dB
Frequency Response(-10dB)	150~18KHz	150~18KHz
Dispersion 1KHz / 4KHz	165° / 100°	165° / 100°
Ambient Temperature	-10°C ~ +55°C	-10°C ~ +55°C
Compliant Standard / Certificate No.	EN54-24 / 1488-CPR-466/W.	
Dimension	276x197x78.7(H)mm	276x197x78.7(H)mm
Material	Steel	Steel
Colour	White (RAL9016)	White (RAL9016)
Weight	2.15Kg	2.15Kg
Mounting	Screw	Screw
Capacitor	N.A.	250V 2.2uF